




VS Y3 26.9



DISTANCE:	38 FEET	VOLUME:	23,12 mL
RATIO:	359,00:1	FORWARD:	13,88 mL
DROP BRUSH:	32 FEET	REVERSE:	9,24 mL
TANKS:	GLIDE	PUMP:	40µL

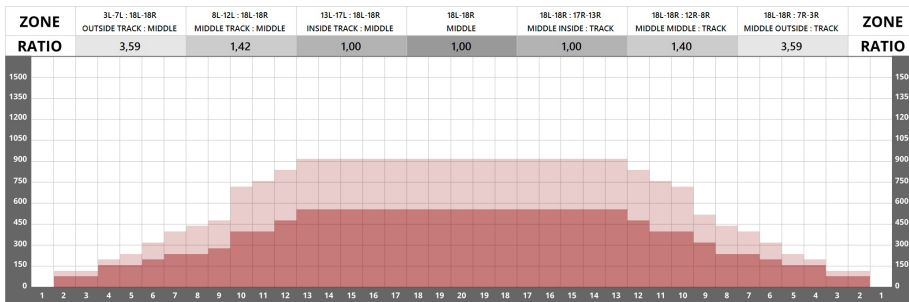

FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	DISTANCE	T.OIL
1	2L	2R	2	40	14	0 → 2	2 960
2	4L	4R	2	40	14	2 → 6	2 640
3	6L	6R	1	40	14	6 → 8	1 160
4	7L	7R	1	40	14	8 → 10	1 080
5	9L	9R	1	40	18	10 → 12	920
6	10L	9R	1	40	18	12 → 15	880
7	10L	10R	2	40	18	15 → 20	1 680
8	12L	12R	2	40	18	20 → 25	1 360
9	13L	13R	2	40	22	25 → 31	1 200
10	2L	2R	0	40	22	31 → 38	0

REVERSE LOADS DATA


#	START	STOP	LOADS	MICS	SPEED	DISTANCE	T.OIL
1	11L	11R	1	40	22	32 → 29	760
2	10L	10R	3	40	22	29 → 20	2 520
3	8L	8R	1	40	22	20 → 17	1 000
4	7L	7R	1	40	22	17 → 14	1 080
5	6L	6R	1	40	14	14 → 12	1 160
6	5L	5R	1	40	14	12 → 10	1 240
7	2L	2R	1	40	14	10 → 8	1 480
8	2L	2R	0	40	14	8 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | REVERSE DROP BRUSH

This pattern may require adjustments if using a lane machine that does not have these features

Created syys 14, 2026 - Rendered for Atlas.

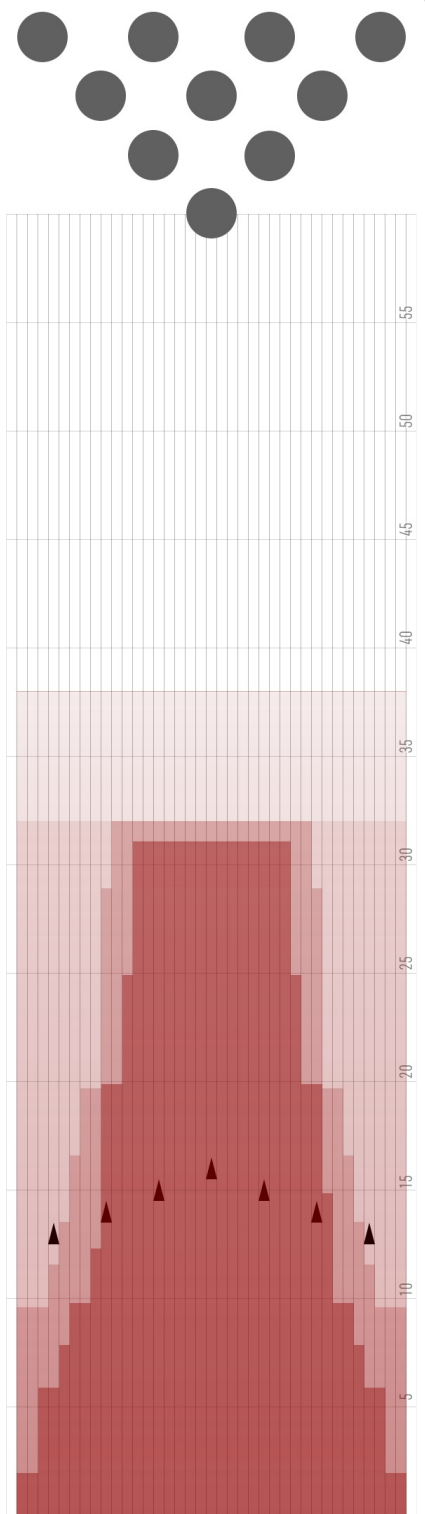

SCAN QR CODE FOR
MORE PATTERNS ON
KEGEL PATTERN
LIBRARY



KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET